
# FORTELLO®

Product description 2014

INTERNATIONAL





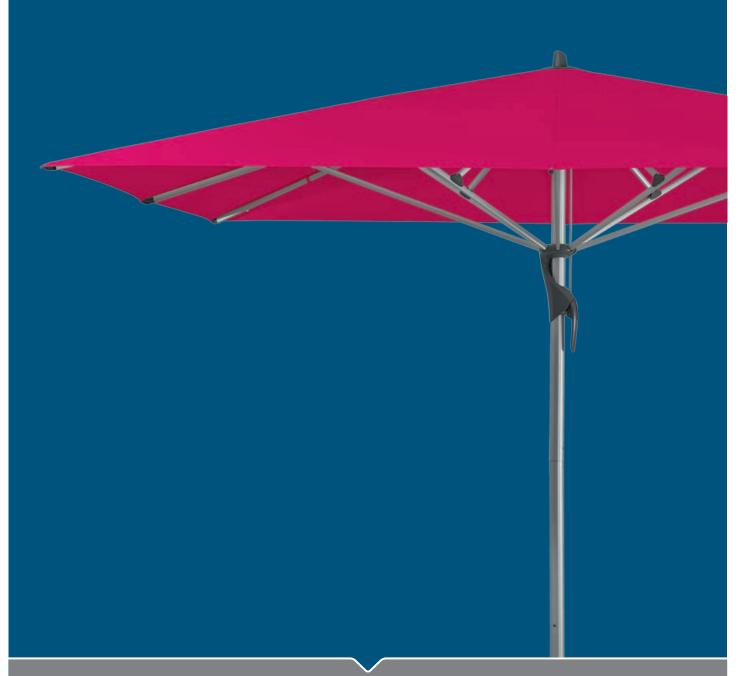

## FORTELLO®



Frame:	8 rods made of natural anodized aluminium, 100 % inox, screws and rivets of high-grade steel, two-part profiled pole $67 \times 3$ mm, contrarotating opening system allowing for easy opening.					
Framematerial:	anodized natural					
Frame shape:	round or square					
Shade cover:	self-tautening thanks to the flexible rod ends, available in material class 5 (100 % acrylic approx. 300 g/m²) and material class 4 (100 % polyester approx. 250 g/m²)					
Flounce:	not available					
Protective cover:	optional					
easy						
Shade cover:	available in material class 2 (100 % polyester approx. 220 g/m²)					
Fixations:						




FORTELLO®, © Int. Design reg.


#### Nominal size FORTELLO®

	<b>Size</b> without flounce	Number of rods	Material class 4 Colours 400 – 499	Material class 5 Colours 500 – 699	Order no. Frame anodized natural
	cm				
	Ø 450	8 parts	1 545.–	1 895.–	325 00 450 171
	$350 \times 350$	8 parts	1 395.–	1 795.–	325 00 351 171
ш	$400 \times 400$	8 parts	1 595.—	1 995.—	325 00 401 171

### Nominal size FORTELLO® easy

	<b>Size</b> without flounce	Number of rods	Material class 2 Colours 150	Order no. Frame anodized natural
	cm			
	Ø 450	8 parts	1 079.—	325 00 450 171
$\sim$				
	$350 \times 350$	8 parts	959.—	 325 00 351 171
	400 × 400	8 parts	1 079.–	325 00 401 171






Accessories FORTELLO®	Sales prices	Order no.
Fixing option M4 (support tube M4 required)		
Base M4, 120 kg, (for 8 plates $40 \times 40 \times 4$ cm), $91 \times 91 \times 11.5$ - 15.5 cm, zinc-plated steel (adjustable and levellable) (price without plates)	230.—	350 01 108 235
Base M4, $180  \text{kg}$ , (for 12 plates $40 \times 40 \times 4  \text{cm}$ ), $91 \times 91 \times 15.5 - 19.5  \text{cm}$ , zinc-plated steel (adjustable and levellable) (price without plates)	295.–	350 01 108 335
Ground socket M4, galvanized steel	125.–	350 01 226 510
Mounting plate M4, $30 \times 30 \times 1.2$ cm, galvanized steel	165.—	350 01 226 920
Wall console M4, extension 480 mm, galvanized steel	295	350 01 229 405
Wall console M4, extension 100 mm, galvanized steel	295.—	350 01 229 410
Mounting plate M4 special, for installation height 50 — 149 mm, galvanized steel	645	350 01 226 932
Mounting plate M4 special, for installation height 150 – 350 mm, galvanized steel	645.—	350 01 226 930
Mounting plate M4 for isolated grounds, installation height made to measure, high-grade steel 1.4301/304	Price on request	350 01 229 730
Support tube M4, P+, galvanized steel	80.—	350 01 200 235
Slabs for basis M4		
Slab set, 8 pieces, $40 \times 40 \times 4$ cm, (ca. 110kg), concrete	125	350 01 226 908
Slab set, 8 pieces, $40 \times 40 \times 4$ cm, (ca. 115 kg), 4 pieces concrete, 4 pieces polished granite	195.—	350 01 226 909
Slab set, 12 pieces, $40 \times 40 \times 4$ cm, (ca. 165 kg), concrete	185.—	350 01 226 907
Slab set, 12 pieces, $40 \times 40 \times 4$ cm, (ca. 170 kg), 8 pieces concrete, 4 pieces polished granite	245.—	350 01 226 906
Protective cover, coated polyester fabric		
Protective cover with zip and rod, $315 \times 60\mathrm{cm}$	130.—	350 01 609 700
Miscellaneous items		
Rechargeable battery light Osyrion 8 for pole Ø 48 – 68 mm, battery charger with european plug (type C) included (1 accumulator included)	199.—	350 01 557 960
Spare accu, 3.7 V, 4800 mAh (for Osyrion 8)	39.—	350 01 557 970

#### **FORTELLO®**

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation 30 – 40 cm deep	Recommended base weight	max. wind speed open perm.
cm	cm	cm	m²	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M	В	E	F	G	H	C		
Ø 450	415	6.7	14.3	130	215	365	290	80 × 80	120	65 (8)
$350 \times 350$		6.7	12.3	115	215	365	280	$80 \times 80$	120	70 (8)
$400 \times 400$		6.7	16.0	95	215	385	290	$100 \times 100$	180	60 (7)

The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm$  2 %  $\pm$  5 cm). Height dimensions are based on ground socket M4. If one of the offered bases is used, these measures raise by 11.5-15.5 cm. The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. In the presence of several sunshades, the minimum distance between one sunshade and another and between sunshades and walls shall be 20 cm.

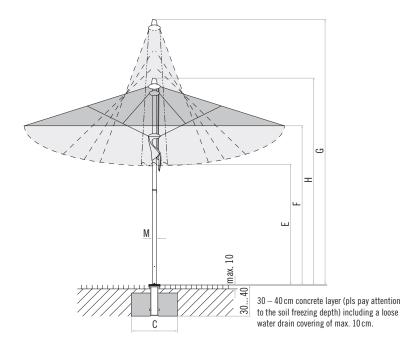

#### Your nearest Glatz representative:



